



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.11.2001 Bulletin 2001/46

(51) Int Cl.7: **H04L 12/56**, **H04L 29/06**,
H04Q 7/22

(21) Application number: **00303873.4**

(22) Date of filing: **09.05.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Chen, Xiaobao X.**
Swindon, Wiltshire SN5 5DQ (GB)

(74) Representative: **Williams, David John et al**
Lucent Technologies UK Limited,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)


(71) Applicant: **LUCENT TECHNOLOGIES INC.**
Murray Hill, New Jersey 07974-0636 (US)

(54) **Resource reservation in 3G or future generation telecommunication network III**

(57) In the UMTS, resource reservation is provided by translating Resource reservation Protocol context messages into and out of Packet Data Protocol messages, the processing being carried out by the translation interface (31) of a mobile terminal (30) which has asso-

ciated terminal equipment (32); the terminal equipment can then be GPRS/UMTS unaware. The RSVP messages are mapped between the mobile terminal (30) and the Gateway support node (26) and regenerated as appropriate.

FIG. 3

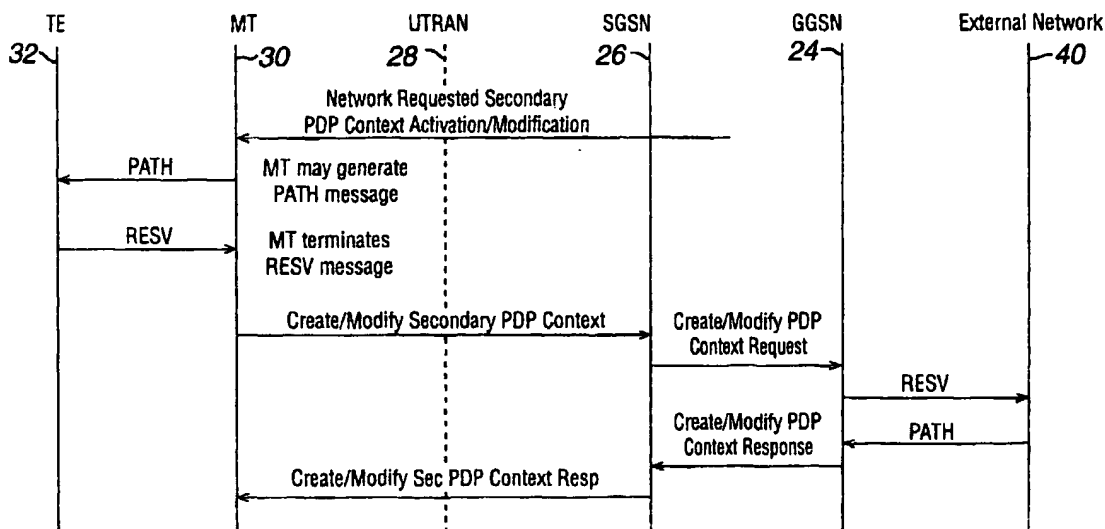

Description

[0001] This invention relates to telecommunications networks operating the Internet Protocol (IP), and relates especially to a method of reserving resources.

[0002] In third generation (3G) telecommunications networks, such as Universal Mobile Telecommunication System (UMTS), broad bandwidth is provided for services such as data and multimedia in addition to voice. An obvious need is that required Quality of Service (QoS) should be provided to users, but in IP networks, if contention for resources is not resolved, then QoS cannot be guaranteed.

[0003] In IP networks or the Internet in general, Resource reSerVation Protocol (RSVP) is used to allow the network to reserve resources so as to provide QoS. RSVP can be used for QoS control locally or it may be used across IP networks.

[0004] RSVP is an end-to-end protocol and is illustrated in Figure 1. A transmitting user 10 sends to a receiving user 12 a message PATH. The PATH message carries the traffic characteristics information such as Tspecs to indicate the traffic behavior that is to be sent from the user 10. When the receiving user receives the PATH message, it sends a RESV message which contains QoS requests such as FlowSpecs. In practice, the transmitting and receiving users 10, 12 can be located remotely so that PATH and RESV messages pass through several nodes in UMTS. As each node receives either of the messages, it makes a decision as to whether adequate resources in that node can be reserved. If this is possible, then the messages are relayed to the next hop for the PATH message and to the previous hop for the RESV message. When the RESV message reaches the transmitting user 10, it begins to transmit data.

[0005] Periodic refresh messages are sent subsequently to maintain the QoS status at each node in which it has been set up.

[0006] RSVP messages need to pass from the Mobile Terminal (MT) to the Radio Access Network (RAN) and then to the Core Network formed by the CN Edge and the Gateway GPRS Support Node of the GPRS/UMTS. Passage of additional RSVP messages means that extra radio resources must be allocated to guarantee that the RSVP messages can pass through the air interface reliably and instantly. Lost or delayed RSVP messages mean longer or failed call set-up, and even dropped calls, and loss of QoS guarantee during handover.

[0007] At the TSG-SA Working Group 2 Meeting no. 12 in Tokyo, 6-9 March 2000, a disclosure was made by applicant of an arrangement in which a mobile system using RSVP was able to communicate with a non-RSVP application in associated terminal equipment (TE); RSVP messages to and from the TE are intercepted by the mobile terminal and translated into and out of secondary PDP Context messages by the mobile. The mobile analyses the RSVP parameters carried in the PATH

message, and determines whether to create a new secondary PDP context or to modify an existing context. In both cases an updated QoS status is provided. The secondary PDP context is then created/modified using existing PDP context control procedures.

[0008] On successful establishment of a secondary PDP Context, the mobile activates an RSVP proxy to terminate RSVP messages. The RSVP proxy is responsible to receiving and processing the PATH messages and generating the RESV messages in response.

[0009] However, it is necessary to provide a proxy in the mobile terminal, which adds to cost and complexity.

[0010] It is an object of the invention to provide an improved arrangement which does not add to cost or complexity of the mobile terminal.

[0011] According to the invention, in a third or future generation telecommunication network, a method of allocating resources for user traffic passing between a mobile terminal and a remote user, there being terminal equipment associated with the mobile terminal, characterized in that Resource reSerVation Protocol messages are processed only within the mobile terminal.

[0012] In the accompanying drawings, Figure 1 illustrates the operation of RSVP. The invention will be described by way of example only, with reference to figures 2 and 3 in which:-

Figure 2 illustrates schematically the UMTS QoS architecture for the control plane; and

Figure 3 illustrates the interchange of messages in a downlink.

[0013] In Figure 2 the UMTS 20 comprises a Core Network (CN) 22 formed by a Gateway GPRS Support Node 24 and a CN Edge 26; there is also a UMTS Terrestrial Radio Access Network (UTRAN) 28. A MT 30 communicates with the UTRAN 28 across a radio interface. The MT 30 is connected to Terminal Equipment (TE) 32 which runs non-UMTS specific applications. The MT 30 is UMTS specific, and is capable of processing the traffic from the TE 32 to channel it appropriately to the UMTS, usually to the radio access network.

[0014] The Gateway 24 communicates with an External Network 40.

[0015] The UMTS 20 operates the application-specific Packet Data Protocol (PDP) context as usual to negotiate the QoS and activate the QoS control between the MT 30 and UMTS network 20.

[0016] Figure 3 shows the message exchanges in a downlink. For traffic QoS control in the downlink, the RSVP processing entity in the MT 30 needs to be triggered. On receipt of a PATH message from the TE 32, the MT 30 forwards the message; the MT 30 decides whether to modify an existing PDP Context message or to create a new secondary PDP context message.

[0017] The secondary PDP Context message is passed through the UTRAN 28 to the CN Edge 26, which passes a create/modify PDP Context Request

message to the Gateway 24, which filters out the PATH message and passes it to the External Network 40. On receipt of a RESV message in return, the process is reversed.

[0018] The MT 30 extracts the TrafficSpecs (eg Tspecs of IntServ) in a PATH message and applies it to the traffic characterization. For a RESV message, the MT extracts the QoS specs, eg FlowSpecs of IntServ, and applies the QoS requirements. The process is also carried out by the receiving TE in the External Network 40.

[0019] The MT 30 extracts the Traffic Specs, such as Tspecs of IntServ, in a PATH message and applies it to the traffic characterization. For a RESV message, the MT extracts the QoS Specs, such as FlowSpecs of IntServ, and applies the requirements.

[0020] It is now proposed that in the MT 30, the existing translation interface 31 (see Fig.2) filters the RSVP message and interprets the QoS requirements that are carried in the RSVP messages and converts them into the QoS profile of GPRS/UMTS PDP context.

[0021] When an RSVP message is generated by the generic RSVP interface at the TE32 and is then passed to the translation interface 31 in the MT 30, the translation interface 31 converts the QoS objects into the PDP context QoS profile which complies with the QoS definitions of GPRS/UMTS.

[0022] A simple mapping relationship is:

RSVP Guaranteed Service (GS) = > GPRS/UMTS
Conversational Service Class
RSVP Controlled Load Service (CL) = > GPRS/
UMTS
Streaming Service Class and Interactive Service
Class
Best-effort Service (BE) = > GPRS/UMTS
Background Service Class

[0023] The above mapping relationship between RSVP services and the GPRS/UMTS services are maintained in the Gateway 24 and the MT with further extension on the PDP context to accommodate the mapping content. After the PDP context is set up, the Gateway 24 regenerates the RSVP message that originates from the MT (or the TE) and relays it to the intended remote end (the receiving application) in the External Network 40.

[0024] Upon receiving the RESV message sent from the remote end as a reply to the MT-originated PATH message, the Gateway 24 terminates a message and notifies the receipt of an RSVP message from the remote peer end to the MT. The translation interface will then re-map the GPRS/UMTS QoS classes into RSVP QoS objects and regenerates an RSVP message as a reply from the remote peer end application to the RSVP originating application at the TE.

[0025] Thus the RSVP messages are not transmitted through the UTRAN but are mapped and recreated

when appropriate.

[0026] The advantages of the functions performed at the MT 30 are that

- a) The MT can be upgraded quickly to cater for new features in the QoS control API (Application Programming Interface)
- b) Allows access independent API at the application level
- c) Allows interface specific controls to override non-interface specific settings for non-mobile aware applications
- d) Allows tight customer control of expensive radio resources
- e) Allows appropriate control of the radio access regardless of whether it is an IP service or a PPP (Point to Point Protocol) service being provided
- f) The MT under the control of the end application can determine by using RSVP whether to modify an existing PDP context or create a new PDP context to provide the QoS needs of each RSVP session.

The MT 30 and SGSN 24 or GGSN 26 are also required to check if RSVP messages are a) sent/received for the first time so as to initiate PDP Context set-up if appropriate; b) modified, in order to initiate PDP Context Modification procedure if appropriate; or c) merely refresh messages to trigger local generation of response.

[0027] The MT 30 and the GGSN 24 also need to check if RSVP messages are a) sent/received for the first time, so as to initiate PDP context set up; b) modified, so as to initiate PDP context modification procedure; or c) merely refresh messages to trigger local generation of responses.

[0028] A further advantage of use of the inventive method is that the Terminal Equipment 32 can be GPRS/UMTS unaware and can therefore be generic

40 Claims

1. In a third or future generation telecommunication network, a method of allocating resources for user traffic passing between a mobile terminal (30) and a remote user, there being terminal equipment (32) associated with the mobile terminal, **characterized in that** Resource reSerVation Protocol messages are processed only within the mobile terminal.
2. A method according to Claim 1 in which said messages are processed by a translation interface (31) within the mobile terminal (30)
3. A method according to Claim 2 in which the translation interface (31) is arranged to translate Resource reSerVation Protocol messages into and out of Packet Data Protocol Context messages.

4. A method according to Claim 2 or Claim 3 in which the translation interface (31) is arranged to map the Resource reSerVation Protocol messages.
5. A method according to any preceding Claim in which Resource reSerVation Protocol messages are also mapped by the Gateway support node(26).

10

15

20

25

30

35

40

45

50

55






FIG. 3



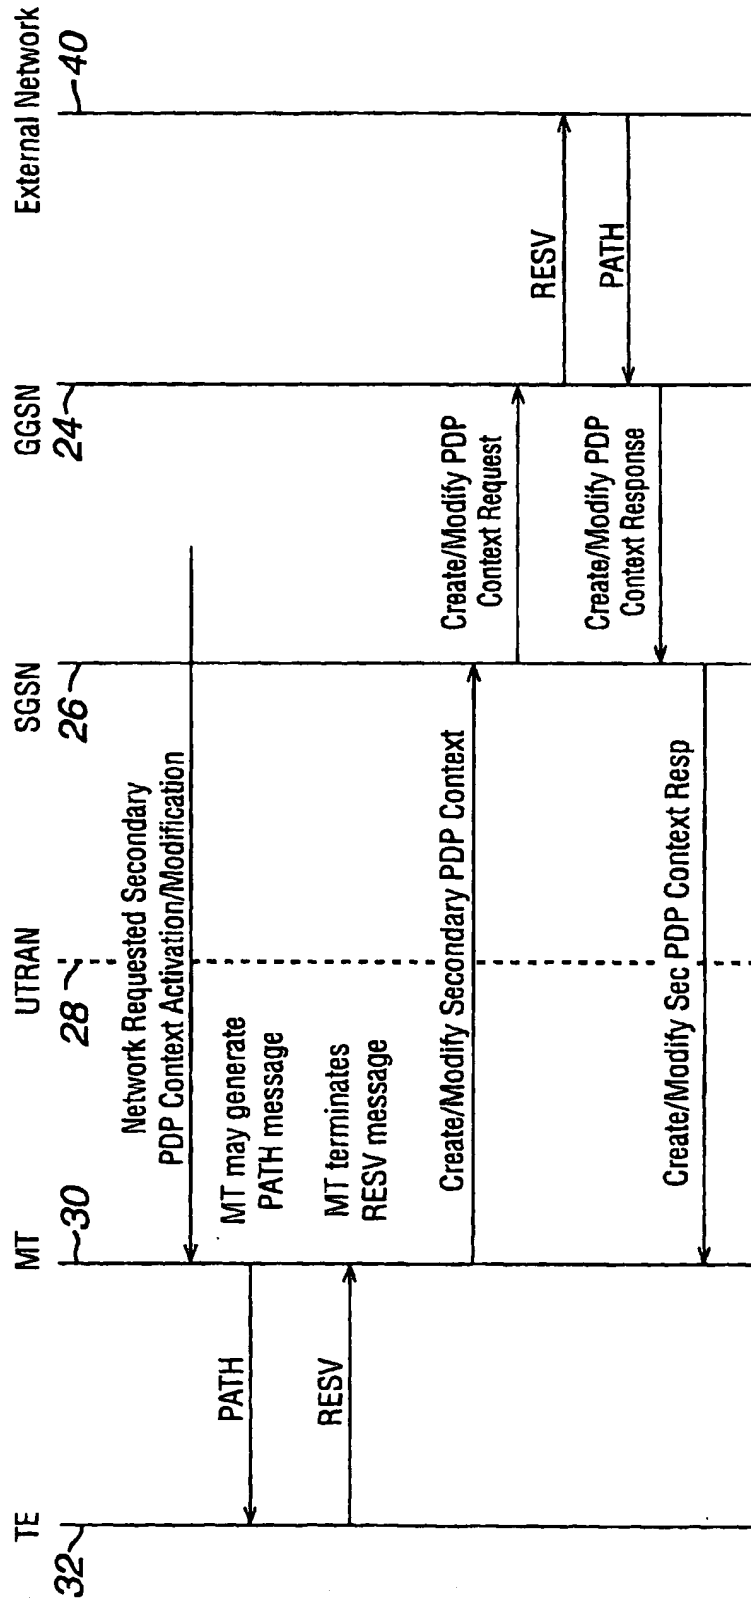

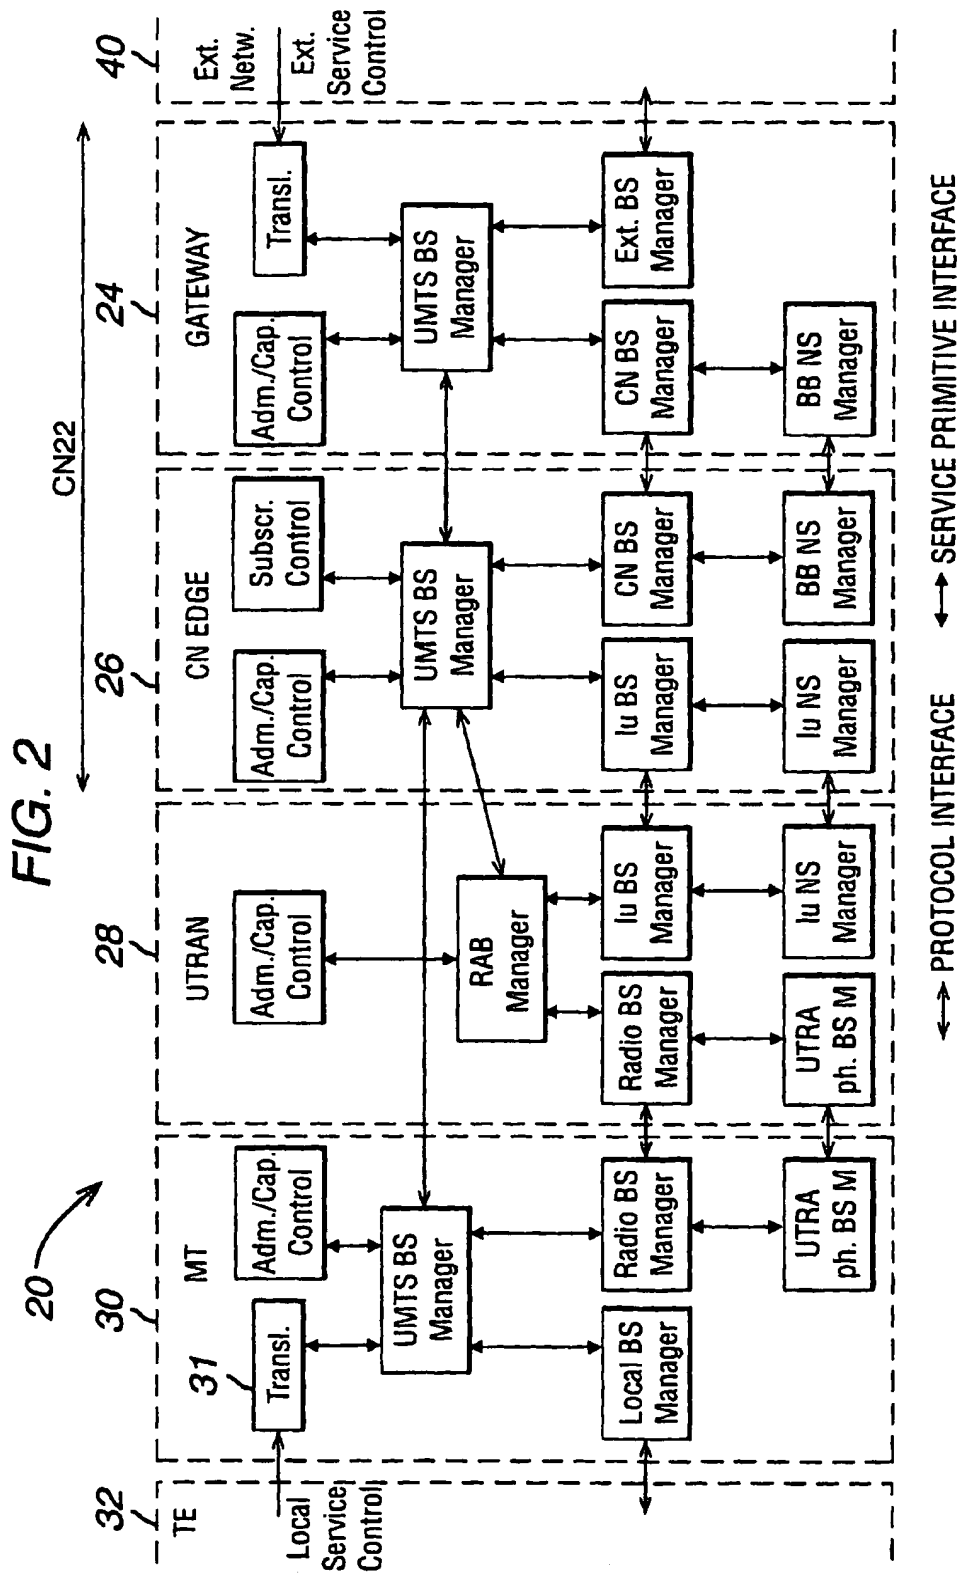

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 3873

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|--|--|---|---|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.7) |
| A | WO 00 10357 A (NOKIA) 24 February 2000 (2000-02-24) * page 18, line 25 - page 29, line 21; figures * | 1-4 | H04L12/56 H04L29/06 H04Q7/22 |
| A | WO 99 05828 A (ERICSSON) 4 February 1999 (1999-02-04) * page 13, line 2 - page 24, line 5; figures * | 1-4 | |
| A | WO 99 33301 A (NOKIA) 1 July 1999 (1999-07-01) * page 7, line 28 - page 9, line 32; figures * | 1-3 | |
| A | US 6 041 359 A (BIRDWELL) 21 March 2000 (2000-03-21) * column 3, line 46 - column 8, line 44; figures * | 1,2 | |
| E | EP 1 051 010 A (LUCENT) 8 November 2000 (2000-11-08) * page 4, column 5, line 58 - page 14, column 25, line 58; figures * | 1-4 | TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04L H04Q |
| E | EP 1 047 244 A (LUCENT) 25 October 2000 (2000-10-25) * page 8, column 14, line 23 - line 37; figure 10 * | 1-4 | |
| E | EP 1 032 179 A (LUCENT) 30 August 2000 (2000-08-30) * page 10, column 18, line 16 - line 30; figures 5-7 * | 1-4 | |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 21 December 2000 | Examiner Geoghegan, C |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p> | | | |

EPO FORM 1503 (03.02.2000)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 3873

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-12-2000

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| WO 0010357 | A | 24-02-2000 | FI 981722 A | 11-02-2000 |
| | | | AU 5291899 A | 06-03-2000 |
| WO 9905828 | A | 04-02-1999 | AU 8369898 A | 16-02-1999 |
| | | | BR 9810796 A | 25-07-2000 |
| | | | CN 1271488 T | 25-10-2000 |
| | | | EP 0997018 A | 03-05-2000 |
| WO 9933301 | A | 01-07-1999 | FI 974558 A | 19-06-1999 |
| | | | AU 1437899 A | 12-07-1999 |
| | | | EP 1040696 A | 04-10-2000 |
| US 6041359 | A | 21-03-2000 | NONE | |
| EP 1051010 | A | 08-11-2000 | WO 0064120 A | 26-10-2000 |
| EP 1047244 | A | 25-10-2000 | WO 0064121 A | 26-10-2000 |
| EP 1032179 | A | 30-08-2000 | AU 1755000 A | 28-09-2000 |
| | | | BR 0000552 A | 12-09-2000 |
| | | | CN 1264979 A | 30-08-2000 |
| | | | JP 2000253069 A | 14-09-2000 |

EPO FORM P4439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82